


# Aluminium column SAL-10 WŁ 3/2,0/3,7/5

diameter Ø176mm at the base plate

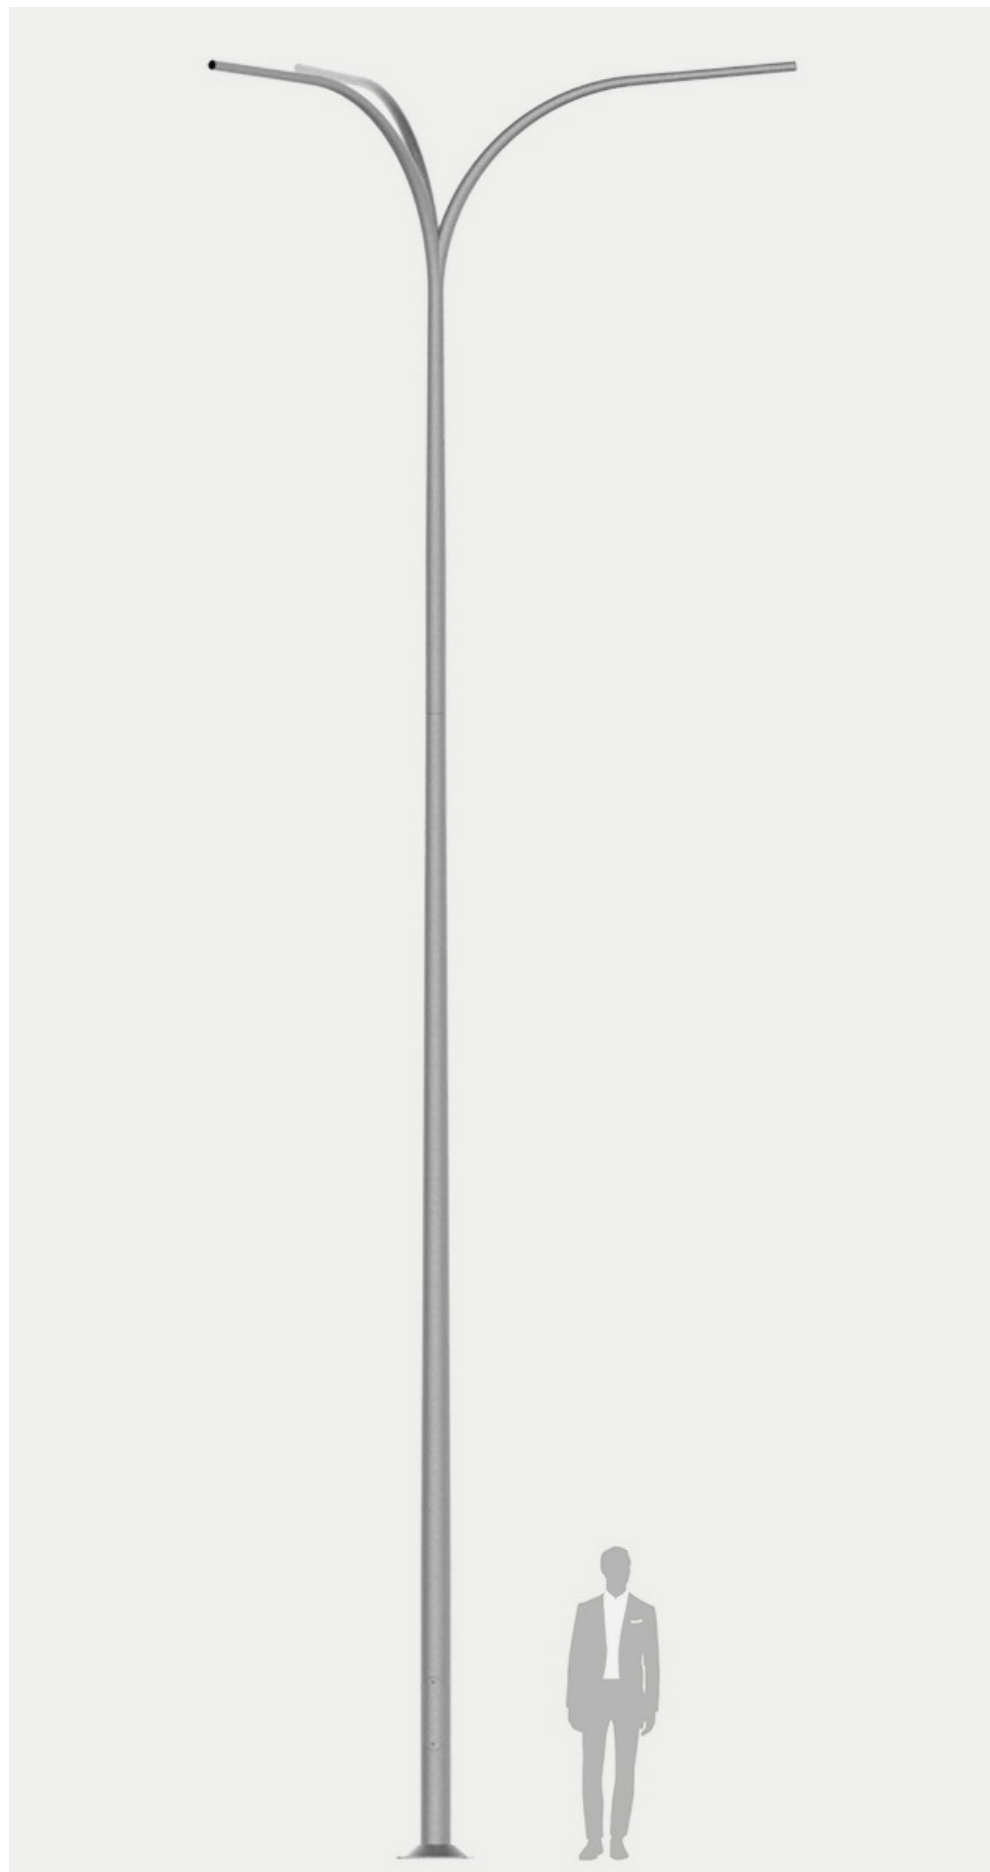


**Anodising:** 10 colours, each with possibility of chemical brightening

**Finish:** grinded, anodised aluminium, option of elastomer protection in the colour of the column up to the height of 350 mm (other height on customer's request)

**Luminaire mounting:** directly on the column, luminaires with mounting Ø60 mm with weight and surface parameters not exceeding the data from the strength table included in the technical data sheet

**Extension arm type:** According to resistance calculations

**Packing:** sleeve material

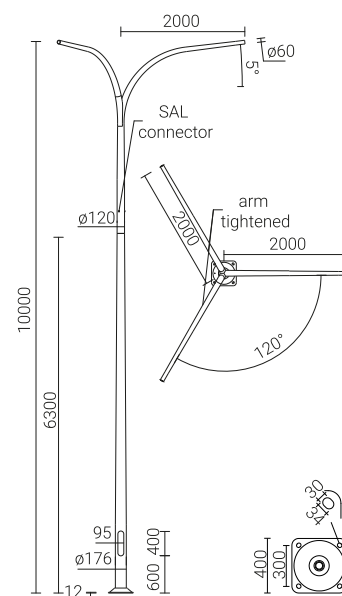

# Aluminium column SAL-10 WŁ 3/2,0/3,7/5

diameter Ø176mm at the base plate



| Code  | Symbol                | Height of the column | Wall thickness | Net weight | Approximate unit volume | Concrete footing / reinforcement basket type | Concrete footing / reinforcement basket code | Fasteners |
|-------|-----------------------|----------------------|----------------|------------|-------------------------|----------------------------------------------|----------------------------------------------|-----------|
| 42442 | SAL-10 WŁ 3/2,0/3,7/5 | 10m                  | —              | 68,9kg     | 1,38m <sup>3</sup>      | B-70 / Z-70                                  | 311170 / 311207                              | 4012      |

SAL-10      WŁ 3/2,0/3,7/5      Acceptable windage of single luminaire [m 2 ] for Cx=0,7

| code 42442                               | Vref. = 22 m/s                  | Vref. = 24 m/s                                    | Vref. = 26 m/s                   | Vref. = 28 m/s                                |
|------------------------------------------|---------------------------------|---------------------------------------------------|----------------------------------|-----------------------------------------------|
| Permissible weight of a single luminaire | I zone, II Field category up to | I & III zone, II Field category up to 450m by s.I | II zone, II Field category up to | III zone, II Field category up to 755m by s.I |
| 15                                       | 0,16                            | 0,1                                               | x                                | x                                             |