



Aluminium column SAL-12 WŁ 1/1,5/5,2/5

diameter Ø176mm at the base plate



- Anodising:** 10 colours, each with possibility of chemical brightening
- Finish:** grinded, anodised aluminium, option of elastomer protection in the colour of the column up to the height of 350 mm (other height on customer's request)
- Luminaire mounting:** directly on the column, luminaires with mounting Ø60 mm with weight and surface parameters not exceeding the data from the strength table included in the technical data sheet
- Extension arm type:** According to resistance calculations
- Packing:** sleeve material

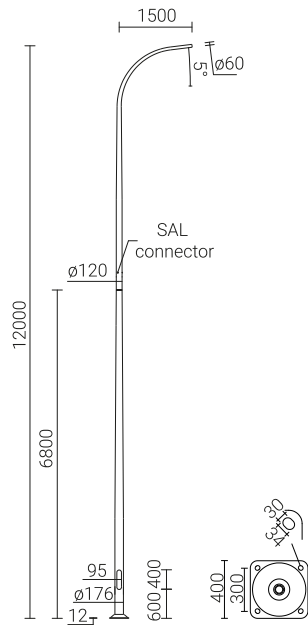

Code	Symbol	Height of the column	Wall thickness	Net weight	Approximate unit volume	Concrete footing / reinforcement basket code
42455	SAL-12 WŁ 1/1,5/5,2/5	12m	—	64,3kg	0,89m³	311171 / 311271

SAL-12 WŁ 1/1,5/5,2/5	Acceptable windage of single luminaire [m 2] for Cx=0,7			
code 42455	Vref. = 22 m/s	Vref. = 24 m/s	Vref. = 26 m/s	Vref. = 28 m/s
Permissible weight of a single luminaire	I zone, II Field category up to	I & III zone, II Field category up to 450m by s.I	II zone, II Field category up to	III zone, II Field category up to 755m by s.I
15	0,14	x	x	x