
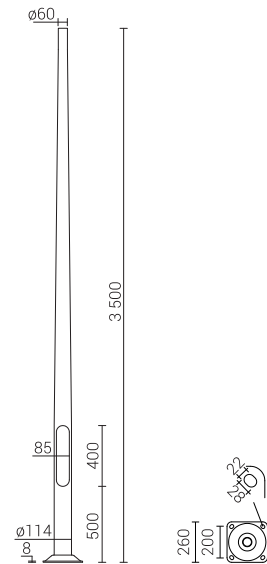


Aluminium column SAL-3,5/D60

diameter Ø114mm at the base plate

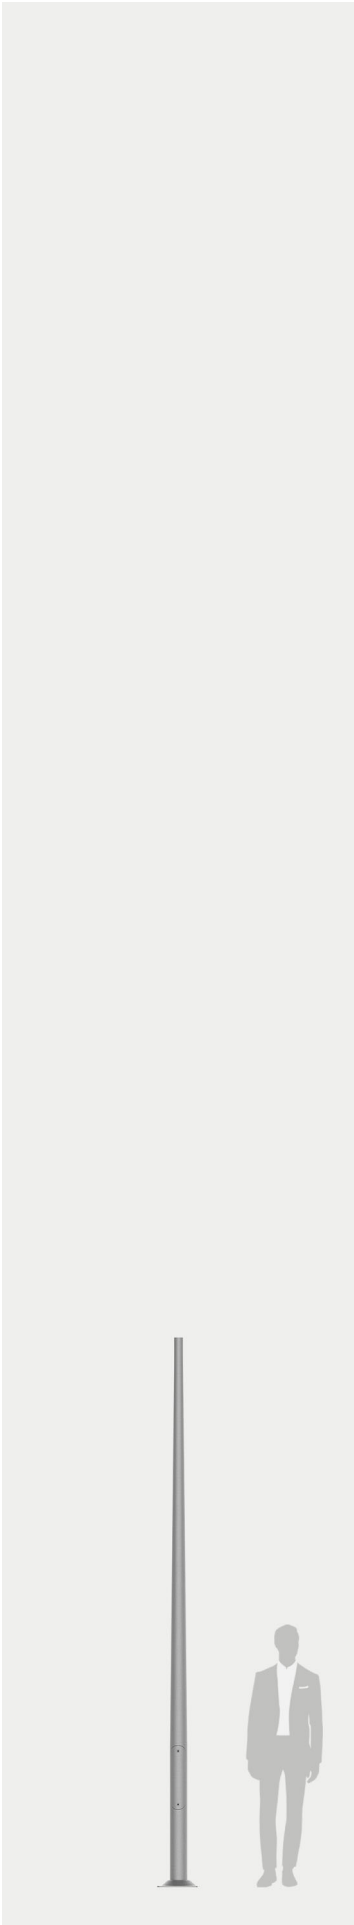

- Anodising:** 10 colours, each with possibility of chemical brightening
- Finish:** grinded, anodised aluminium, option of elastomer protection in the colour of the column up to the height of 350 mm (other height on customer's request)
- Luminaire mounting:** directly on the column, luminaires with mounting Ø60 mm with weight and surface parameters not exceeding the data from the strength table included in the technical data sheet
- Extension arm type:** According to resistance calculations
- Packing:** sleeve material

Code	Symbol	Height of the column	Wall thickness	Net weight	Approximate unit volume	Concrete footing / reinforcement basket type	Concrete footing / reinforcement basket code	Fasteners
42114	SAL-3,5/D60	3,5m	3mm	10,2kg	0,101m ³	B-51 / Z-51	311151 / 311251	4008

SAL-3,5/D60	Acceptable windage of single luminaire [m ²] for Cx=1			
Code 42114Z	Vref. = 22 m/s	Vref. = 24 m/s	Vref. = 26 m/s	Vref. = 28 m/s

Type of extension arm	Permissible weight of a single luminaire	I zone, II Field category	I & III zone, II Field category up to 450m by s.I	II zone, II Field category	III zone, II Field category up to 755m by s.I
-	20	0,69	0,59	0,49	0,42
WA-1	10	0,57	0,47	0,38	0,31
WA-4	10	0,41	0,33	0,25	0,19
WA-5/1	10	0,24	0,19	0,14	0,11
WA-14/1	10	0,31	0,25	0,19	0,15
WR-4/1/0,5/5	-	ISKRA LED			
WR-4/1/0,5/5 ZP	-	ISKRA LED			
WR-8B/1/0,35/0	-	ISKRA LED			
WR-8B/1/0,35/5	-	ISKRA LED			
WR-8B/1/0,35/10	-	ISKRA LED			