
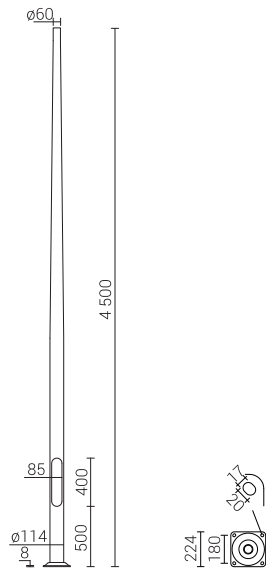


Aluminium column SAL-4,5/B60

diameter Ø114mm at the base plate

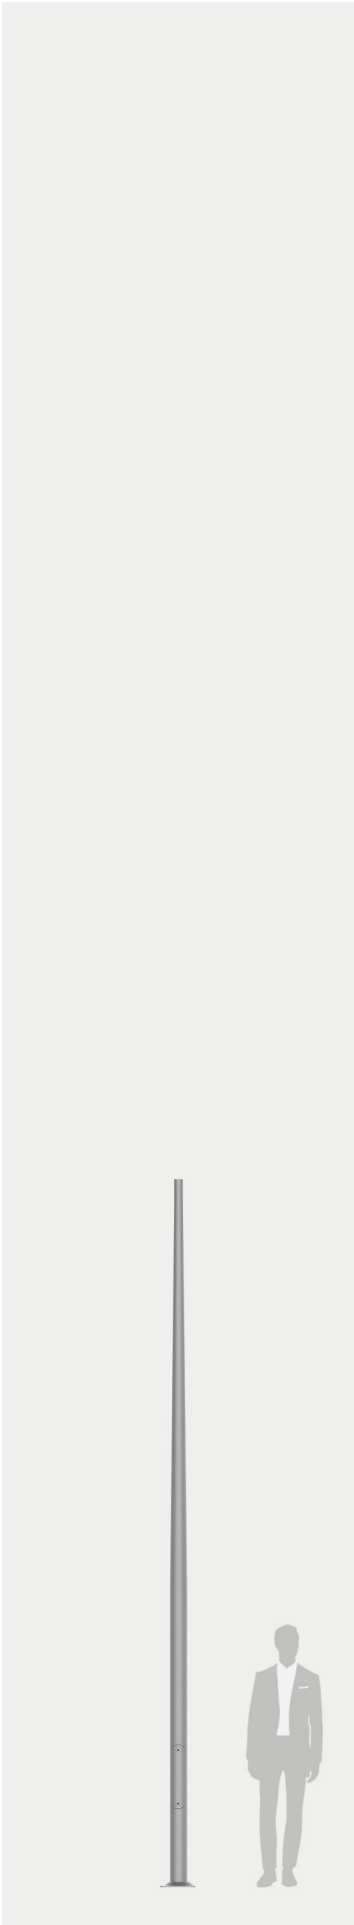

- Anodising:** 10 colours, each with possibility of chemical brightening
- Finish:** grinded, anodised aluminium, option of elastomer protection in the colour of the column up to the height of 350 mm (other height on customer's request)
- Luminaire mounting:** directly on the column, luminaires with mounting Ø60 mm with weight and surface parameters not exceeding the data from the strength table included in the technical data sheet
- Extension arm type:** According to resistance calculations
- Packing:** sleeve material

Code	Symbol	Height of the column	Wall thickness	Net weight	Approximate unit volume	Concrete footing / reinforcement basket type	Concrete footing / reinforcement basket code	Fasteners
42103	SAL-4,5/B60	4,5m	3mm	12,9kg	0,1m ³	B-50 / Z-50	311150 / 311205	4006

SAL-4,5/B60		Acceptable windage of single luminaire [m ²] for Cx=1			
Code 42103		Vref. = 22 m/s	Vref. = 24 m/s	Vref. = 26 m/s	Vref. = 28 m/s
Type of extension arm	Permissible weight of a single luminaire	I zone, II Field category	I & III zone, II Field category up to 450m by s.I	II zone, II Field category	III zone, II Field category up to 755m by s.I
-	20	0,39	0,32	0,25	0,20
WA-1	10	0,29	0,23	0,16	0,12
WA-4	10	0,17	0,12	0,06	x
WA-5/1	10	0,12	0,08	x	x
WA-14/1	10	0,16	0,11	0,07	x
WR-8B/1/0,35/0	-	ISKRA LED			
WR-8B/1/0,35/5	-	ISKRA LED			
WR-8B/1/0,35/10	-	ISKRA LED			