
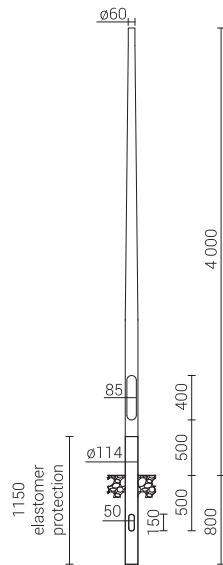


# Aluminium column SAL-4/B60 dz

diameter  $\varnothing 114$ mm at the base plate

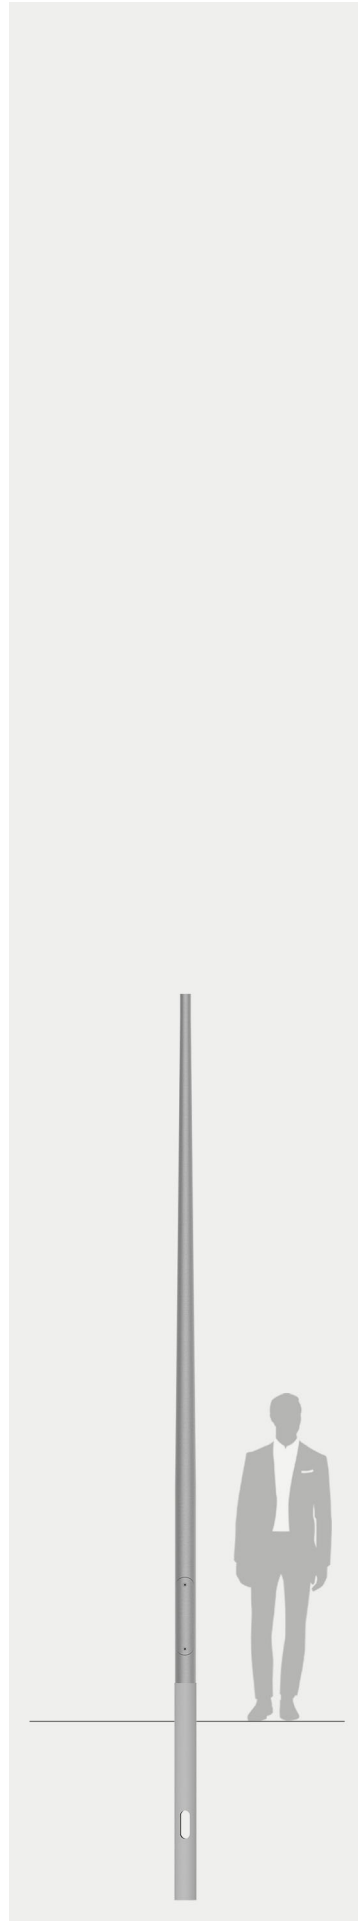


**Anodising:** 10 colours, each with possibility of chemical brightening

**Finish:** grinded, anodised aluminium, elastomer protection in the colour of the column up to the height of 350 mm (other height on customer's request)

**Luminaire mounting:** directly on the column, luminaires with mounting  $\varnothing 60$  mm with weight and surface parameters not exceeding the data from the strength table included in the technical data sheet

**Extension arm type:** According to resistance calculations

**Packing:** sleeve material



Code	Symbol	Height of the column	Wall thickness	Net weight	Approximate unit volume
<b>42111</b>	SAL-4/B60 dz	4m	3mm	12,9kg	0,03m <sup>3</sup>

SAL-4/B60 dz

Acceptable windage of single luminaire [m<sup>2</sup>] for Cx=1

Code 42111	Vref. = 22 m/s	Vref. = 24 m/s	Vref. = 26 m/s	Vref. = 28 m/s	
Type of extension arm	Permissible weight of a single luminaire	I zone, II Field category	I & III zone, II Field category up to 450m by s.I	II zone, II Field category	III zone, II Field category up to 755m by s.I
-	20	0,53	0,45	0,36	0,30
WA-1	10	0,41	0,34	0,26	0,21
WA-4	10	0,28	0,21	0,14	0,10
WA-5/1	10	0,17	0,13	0,09	0,07
WA-14/1	10	0,23	0,18	0,13	0,09
WR-8B/1/0,35/0	-			ISKRA LED	
WR-8B/1/0,35/5	-			ISKRA LED	
WR-8B/1/0,35/10	-			ISKRA LED	