
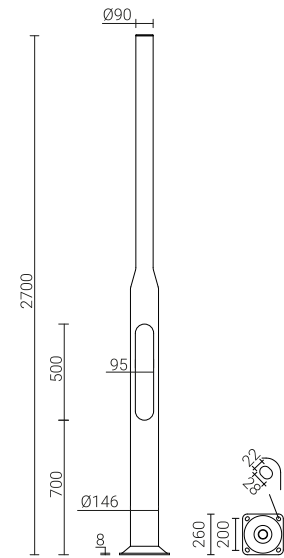


Aluminium column SAL SYG 2,7-B146

diameter Ø146mm at the base plate

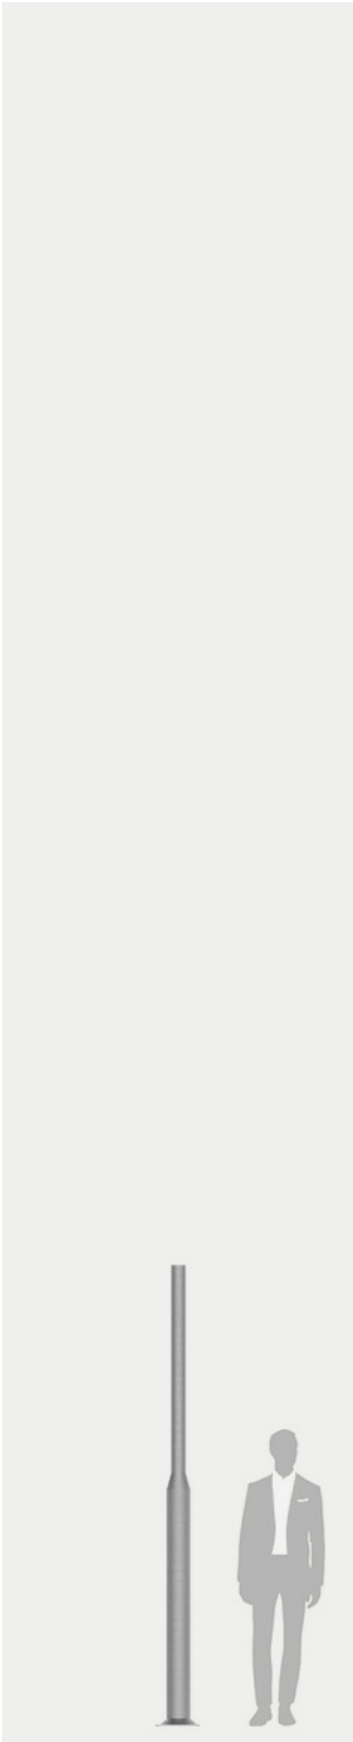

- Anodising:** 10 colours, each with possibility of chemical brightening
- Finish:** grinded, anodised aluminium, option of elastomer protection in the colour of the column up to the height of 350 mm (other height on customer's request)
- Luminaire mounting:** directly on the column, luminaires with mounting Ø60 mm with weight and surface parameters not exceeding the data from the strength table included in the technical data sheet
- Extension arm type:** According to resistance calculations
- Packing:** sleeve material

Code	Symbol	Height of the column	Wall thickness	Net weight	Approximate unit volume	Concrete footing / reinforcement basket type	Concrete footing / reinforcement basket code	Fasteners
42820	SAL SYG 2,7-B146	2,7m	4,2mm	13,2kg	0,089m ³	B-51 / Z-51	311151 / 311251	4008
SAL SYG 2,7-B146		Acceptable windage of traffic signal lights and signs [m2] for Cx=1,2						
code 42820			Vref. = 22 m/s		Vref. = 24 m/s	Vref. = 26 m/s		Vref. = 28 m/s
Acceptable mass of single traffic signal light [kg]			I zone, II Field category up to		I & III zone, II Field category up to 450m by s.I	II zone, II Field category up to		III zone, II Field category up to 755m by s.I
30			1,25		1,09	0,91		0,80