


Aluminium column MAL-16

diameter $\varnothing 225\text{mm}$ at the base plate

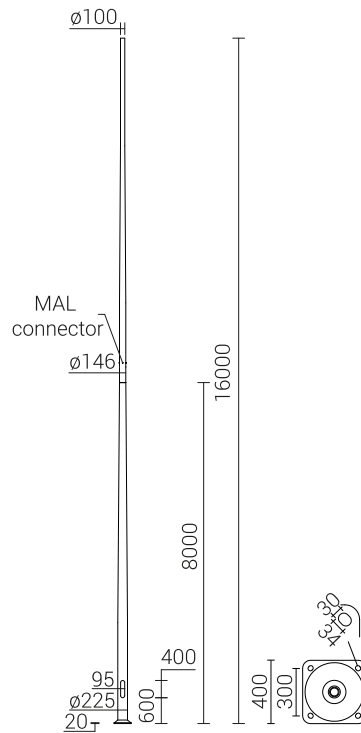

Anodising: 10 colours, each with possibility of chemical brightening

Finish: grinded, anodised aluminium, option of elastomer protection in the colour of the column up to the height of 350 mm (other height on customer's request)

Luminaire mounting: directly on the column, luminaires with mounting $\varnothing 60$ mm with weight and surface parameters not exceeding the data from the strength table included in the technical data sheet

Extension arm type: According to resistance calculations

Packing: sleeve material



Code	Symbol	Height of the column	Wall thickness	Net weight	Approximate unit volume	Concrete footing / reinforcement basket type	Concrete footing / reinforcement basket code	Fasteners
42508	MAL-16	16m	5mm	115,2kg	0,78m ³	B-80 / Z-80	311180 / 311208	4012

MAL-16 Acceptable windage of single luminaire [m²] for Cx=1

code 42508	Vref. = 22 m/s	Vref. = 24 m/s	Vref. = 26 m/s	Vref. = 28 m/s	
Extension arm type	Permissible weight of a single luminaire	I zone, II Field category up to	I & III zone, II Field category up to 450m by s.I	II zone, II Field category up to	III zone, II Field up to 755m t
WM-1	15	0,37	0,28	0,18	0,15
WM-2	15	0,14	0,1	x	x
WM-21	15	0,11	x	x	x

MAL-16 Acceptable windage of single luminaire [m²] for Cx=1

code 42508	Vref. = 22 m/s	Vref. = 24 m/s	Vref. = 26 m/s	Vref. = 28 m/s
Permissible weight of a single luminaire	I zone, II Field category up to	I & III zone, II Field category up to 450m by s.I	II zone, II Field category up to	III zone, II Field category up to 755m by s.I
40	0,34	0,27	0,17	0,14
90	0,23	0,17	x	x